

Straight Blade Devices Construction Specification Grade Receptacles


15 & 20A, 125V

Pass & Seymour
legrand®

Straight Blade Devices

Features

- Impact-resistant **nylon** face and **thermoplastic** back body.
- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- 8 hole internal screw-pressure-plate back wire terminals accept #10 – 14 AWG solid or stranded copper or copper-clad conductors.
- Terminal compartments isolated from each other for positive conductor containment.
- Easily accessible break-off tab on line contact for split circuit wiring.
- One-piece, triple-wipe brass power contact.
- Automatic grounding to metallic boxes.
- Tri-drive terminal and mounting screws.

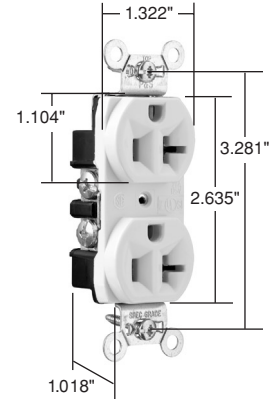

CRB Series

NEW

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A.	V.			UL	FSUL	SR
Duplex Receptacles Back & Side Wire							
CRB5262-I	15	125	Ivory	5-15R	•	•	•
CRB5262-W	15	125	White	5-15R	•	•	•
CRB5262	15	125	Brown	5-15R	•	•	•
CRB5262-GRY	15	125	Gray	5-15R	•	•	•
CRB5262-BK	15	125	Black	5-15R	•	•	•
CRB5262-RED	15	125	Red	5-15R	•	•	•
CRB5262-LA	15	125	Light Almond	5-15R	•	•	•
CRB5362-I	20	125	Ivory	5-20R	•	•	•
CRB5362-W	20	125	White	5-20R	•	•	•
CRB5362	20	125	Brown	5-20R	•	•	•
CRB5362-GRY	20	125	Gray	5-20R	•	•	•
CRB5362-BK	20	125	Black	5-20R	•	•	•
CRB5362-RED	20	125	Red	5-20R	•	•	•
CRB5362-LA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA
5-15R



NEMA
5-20R

Construction Specification Grade Receptacles

Straight Blade Devices Construction Specification Grade Receptacles


15 & 20A, 125V

Pass & Seymour
legrand®

Straight Blade Devices

Features

- Impact-resistant **nylon** face and **thermoplastic** back body.
- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- 8 hole internal screw-pressure-plate back wire terminals accept #10 – 14 AWG solid or stranded copper or copper-clad conductors.
- Terminal compartments isolated from each other for positive conductor containment.
- Easily accessible break-off tab on line contact for split circuit wiring.
- One-piece, triple-wipe brass power contact.
- Automatic grounding to metallic boxes.
- Tri-drive terminal and mounting screws.

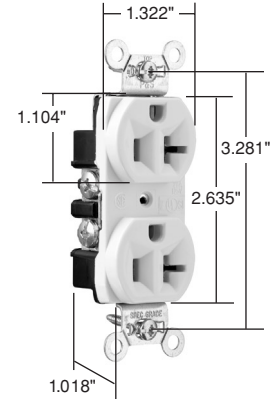

CRB Series

NEW

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A.	V.			UL	FSUL	SR
Duplex Receptacles Back & Side Wire							
CRB5262-I	15	125	Ivory	5-15R	•	•	•
CRB5262-W	15	125	White	5-15R	•	•	•
CRB5262	15	125	Brown	5-15R	•	•	•
CRB5262-GRY	15	125	Gray	5-15R	•	•	•
CRB5262-BK	15	125	Black	5-15R	•	•	•
CRB5262-RED	15	125	Red	5-15R	•	•	•
CRB5262-LA	15	125	Light Almond	5-15R	•	•	•
CRB5362-I	20	125	Ivory	5-20R	•	•	•
CRB5362-W	20	125	White	5-20R	•	•	•
CRB5362	20	125	Brown	5-20R	•	•	•
CRB5362-GRY	20	125	Gray	5-20R	•	•	•
CRB5362-BK	20	125	Black	5-20R	•	•	•
CRB5362-RED	20	125	Red	5-20R	•	•	•
CRB5362-LA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA
5-15R




NEMA
5-20R

Construction Specification Grade Receptacles

Technical Specifications

Construction Specification Grade Receptacles

Back & Side Wire, 2 Pole, 3 Wire Grounding 15 & 20A, 125V

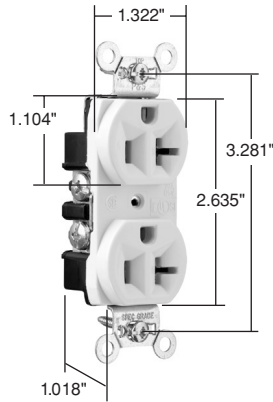

CRB Series



NEMA
5-15R



NEMA
5-20R

Typical Specifications

Manufacturer's Identification: Pass & Seymour/Legrand CRB5262
 Description: Construction Specification Grade, Side & Back Wire
 Type: 2 Pole, 3 Wire Grounding
 Rating: 15A, 125V
 3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596. CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42.27



Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
<input type="checkbox"/> CRB5262-I	Ivory	15A 125V	5-15R	<input type="checkbox"/> CRB5362-I	Ivory	20A 125V	5-20R
<input type="checkbox"/> CRB5262-W	White	15A 125V	5-15R	<input type="checkbox"/> CRB5362-W	White	20A 125V	5-20R
<input type="checkbox"/> CRB5262	Brown	15A 125V	5-15R	<input type="checkbox"/> CRB5362	Brown	20A 125V	5-20R
<input type="checkbox"/> CRB5262-GRY	Gray	15A 125V	5-15R	<input type="checkbox"/> CRB5362-GRY	Gray	20A 125V	5-20R
<input type="checkbox"/> CRB5262-BK	Black	15A 125V	5-15R	<input type="checkbox"/> CRB5362-BK	Black	20A 125V	5-20R
<input type="checkbox"/> CRB5262-LA	Lt. Al.	15A 125V	5-15R	<input type="checkbox"/> CRB5362-LA	Lt. Al.	20A 125V	5-20R
<input type="checkbox"/> CRB5262-RED	Red	15A 125V	5-15R	<input type="checkbox"/> CRB5362-RED	Red	20A 125V	5-20R

Performance

Electrical

Dielectric Voltage Withstands 2,000V minimum
 Maximum Working Voltage 250V
 Current Interrupting Certified for current interrupting at full-rated current
 Temperature Rise Max 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification Terminal Identification in accordance with UL498 (Brass, White, Green)
 Terminal Accommodation #14 – #10 AWG copper conductor only
 Product Identification Ratings are a permanent part of the device

Environmental

Flammability UL94 V2
 Operating Temperature Maximum continuous +60°C, minimum -40°C (without impact)

Materials


Face	Nylon	Hex Head	
Back Body	Thermoplastic	Grounding Screw	Tri-Drive Zinc-Plated CRS
Contacts	.032" (.8) Brass, Triple-wipe	Assembly Rivets	Zinc-Plated CRS
Clamping Plate	.080" CRS Zinc-Plated Steel	Auto Ground Clip	Stainless Steel
Mounting Strap	Zinc-Plated Steel	Binding Combo Head	
Terminal Screws	Tri-Drive Steel	Mounting Screws	Tri-Drive Zinc-Plated Steel

Consult Straight Blade Section B in Product Guide for complete compliance listing.


Technical Specifications

Construction Specification Grade Receptacles

Back & Side Wire, 2 Pole, 3 Wire Grounding 15 & 20A, 125V

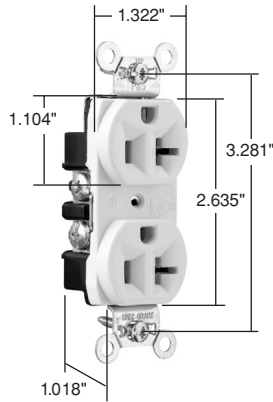

CRB Series



Typical Specifications

Manufacturer's Identification: Pass & Seymour/Legrand CRB5262
 Description: Construction Specification Grade, Side & Back Wire
 Type: 2 Pole, 3 Wire Grounding
 Rating: 15A, 125V
 3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596. CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42.27



Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
<input type="checkbox"/> CRB5262-I	Ivory	15A 125V	5-15R	<input type="checkbox"/> CRB5362-I	Ivory	20A 125V	5-20R
<input type="checkbox"/> CRB5262-W	White	15A 125V	5-15R	<input type="checkbox"/> CRB5362-W	White	20A 125V	5-20R
<input type="checkbox"/> CRB5262	Brown	15A 125V	5-15R	<input type="checkbox"/> CRB5362	Brown	20A 125V	5-20R
<input type="checkbox"/> CRB5262-GRY	Gray	15A 125V	5-15R	<input type="checkbox"/> CRB5362-GRY	Gray	20A 125V	5-20R
<input type="checkbox"/> CRB5262-BK	Black	15A 125V	5-15R	<input type="checkbox"/> CRB5362-BK	Black	20A 125V	5-20R
<input type="checkbox"/> CRB5262-LA	Lt. Al.	15A 125V	5-15R	<input type="checkbox"/> CRB5362-LA	Lt. Al.	20A 125V	5-20R
<input type="checkbox"/> CRB5262-RED	Red	15A 125V	5-15R	<input type="checkbox"/> CRB5362-RED	Red	20A 125V	5-20R

Performance

Electrical

Dielectric Voltage Withstands 2,000V minimum
 Maximum Working Voltage 250V
 Current Interrupting Certified for current interrupting at full-rated current
 Temperature Rise Max 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification Terminal Identification in accordance with UL498 (Brass, White, Green)
 Terminal Accommodation #14 – #10 AWG copper conductor only
 Product Identification Ratings are a permanent part of the device

Environmental

Flammability UL94 V2
 Operating Temperature Maximum continuous +60°C, minimum -40°C (without impact)

Materials

Face	Nylon	Hex Head	
Back Body	Thermoplastic	Grounding Screw	Tri-Drive Zinc-Plated CRS
Contacts	.032" (.8) Brass, Triple-wipe	Assembly Rivets	Zinc-Plated CRS
Clamping Plate	.080" CRS Zinc-Plated Steel	Auto Ground Clip	Stainless Steel
Mounting Strap	Zinc-Plated Steel	Binding Combo Head	
Terminal Screws	Tri-Drive Steel	Mounting Screws	Tri-Drive Zinc-Plated Steel

Consult Straight Blade Section B in Product Guide for complete compliance listing.